

HSV[⊕] Filter Housing

- industrial vent





Physical Characteristics

Bowl Height	Dimensions (mm)	Total Weight (Kg)			
	A	B	C	Head	Total
5" (125 mm)	132	274	194	0.9	2.6
10" (250 mm)	132	424	313	1.5	2.6
20" (500 mm)	132	674	561	2.5	2.6
30" (750 mm)	132	919	809	3.5	2.6
40" (1000 mm)	132	1169	1057	4.5	2.6
					7.6

Dimensions shown are for a vessel with 1/2" BSPT/DIN 4237 outlet port.

For other formats, please contact Parker domnick hunter.

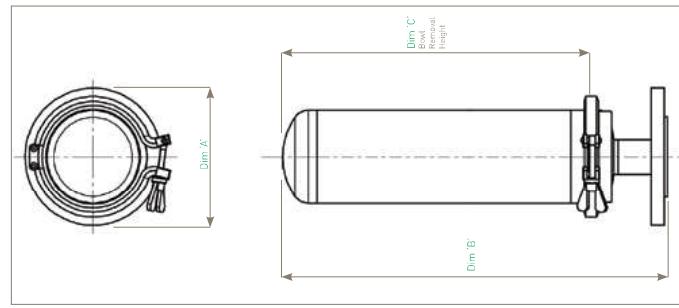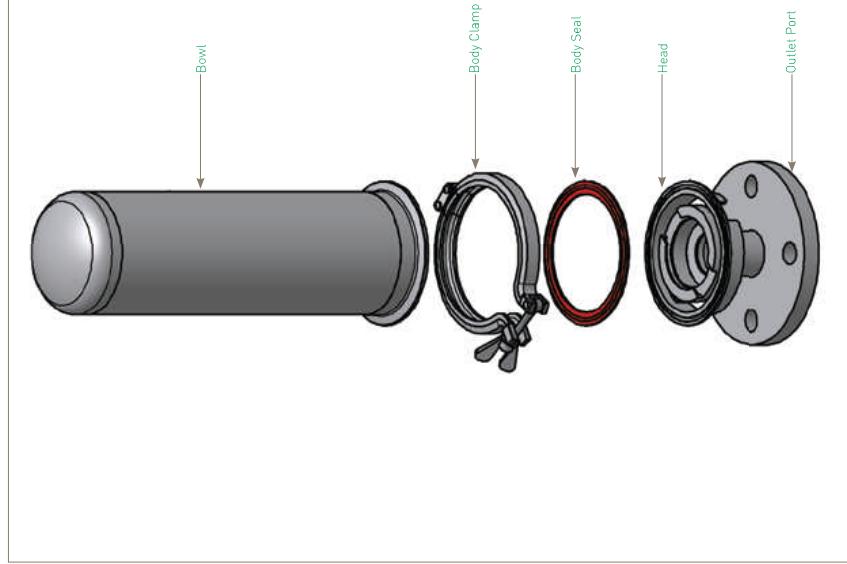

Specification

Materials of Construction

Housing:	316L Stainless Steel
Seals:	EPDM FDA
	PTFE FDA
	Silicone FDA
	Viton FDA

Note: Seal used only to positive bowl clamping arrangement.

Surface Finish

Industrial Finish	As Welded
Internal:	Pickled & Passivated
External:	Polished 0.8 µm Ra
Beverage Finish	Polished 0.4 µm Ra
Internal:	Polished 0.25 µm Pa
External:	Pharmaceutical Finish
Internal:	Polished 0.4 µm Ra and Electropolished
External:	Polished 0.25 µm Ra

Welding
All assembly welds are full penetration.
All welds are crevice and undercut free.
Weld finish & detail drawings available upon request.

Design Basis
ATEX 94/9/EC (where applicable)

Ordering Information

HSV	<input type="checkbox"/>															
Code	Vessel Class	Code	Length (Nominal)	Code	Connection Size	Code	Cartridge	Code	Seal	Code	Surface Finish	Code	Internal	External	Code	Tagged
DH	Standard	K	5" (125 mm)	C	2" (50.8 mm)	E	EPDM	B	Beverage	0.4 mm	0.75 mm	T	Yes			
AT	ATEX	1	10" (250 mm)	Y	1 1/2" (38.1 mm)	P	PTFE		Industrial	As Welded	0.8 µm	X	No			
		2	20" (500 mm)		3" (76.2 mm)	M	Silicone		Pharmaceutical	0.4 µm EP	0.25 µm					
		3	30" (750 mm)		4" (101.6 mm)	N	Viton									
		4	40" (1000 mm)		40" (1000 mm)	F										
						L										

Code numbers
for ordering:
see page 42