




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



PSD1 Parker Servo Drive

Standalone Servo Drive and Multi-axis Servo System



ENGINEERING YOUR SUCCESS.



WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Parker Servo Drive - PSD

Overview	5
PSD Overview	6
Technical Characteristics.....	8
Technical Data.....	8
Environmental Characteristics	9
Standards & Conformance	9
Dimensions	9
Specific Functionalities.....	10
Safety configuration	10
Programmable Version.....	12
Order Code.....	13
Parker Servo Drive PSD	13
Accessories	14
Resolver cables	15
Motor power cables	15

Parker Hannifin

The global leader in motion and control technologies

A world class player on a local stage

Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

Electromechanical Worldwide Manufacturing Locations

Europe

Littlehampton, United Kingdom
Dijon, France
Offenburg, Germany
Filderstadt, Germany
Milan, Italy

Asia

Wuxi, China
Jangan, Korea
Chennai, India

North America

Rohnert Park, California
Irwin, Pennsylvania
Charlotte, North Carolina
New Ulm, Minnesota



Offenburg, Germany

Local Manufacturing and Support in Europe

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout Europe.

For contact information, please refer to the Sales Offices on the back cover of this document or visit www.parker.com




Milan, Italy



Littlehampton, UK



Filderstadt, Germany

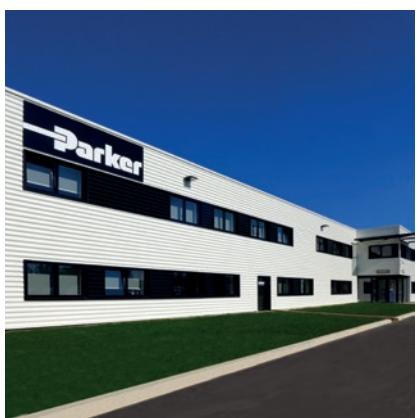

Dijon, France

Parker Servo Drive - PSD

Overview

Description

The PSD1 is Parker Servo Drive family, available with different power rating from 2 to 30A and form factors. Today the offering contains:

The PSD1-S is a standalone drive which can be connected directly to the main supply.

The PSD1-M is a multi-axis servo system where each axis module can supply up to three servo motors. The base configuration consists of a common DC bus supply and multiples PSD1-M modules, connected through DC bus bars. The modules are available as one, two or three axis versions. This makes the system highly flexible.


PSD1-M servo system is particularly suitable for all centralised automation systems, such as those found in many packaging machines, where large numbers of drives are often required offering significant advantages.



PSD1-S unique features

- Single or three phases power supply
- Compact housing
- Particularly suitable for small machines

Standalone axis PSD1 S	Continuous current [A _{rms}]	Peak current A (≤ 2 s)
PSD1 SW1200	2	6
PSD1 SW1300	5	15

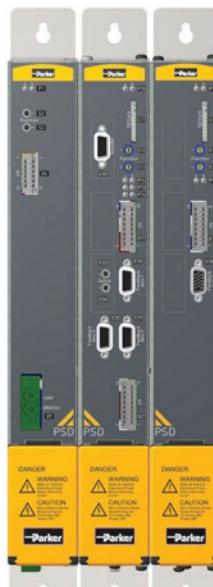

PSD1-M unique features

- The most compact multi-axis servo system on the market
- One, two or three axis versions combined in one housing
- Common DC bus connection for energy exchange between drives

Multi axis PSD1 M	Continuous current [A _{rms}]	Peak current A (≤ 2 s)
PSD1 MW1300	5	10
PSD1 MW1400	8	16
PSD1 MW1600	15	30
PSD1 MW1800	30	60
PSD1 MW2220	2 + 2	4 + 4
PSD1 MW2330	5 + 5	10 + 10
PSD1 MW2440	8 + 8	16 + 16
PSD1 MW3222	2 + 2 + 2	4 + 4 + 4
PSD1 MW3433	8 + 5 + 5	16 + 10 + 10

(additional module on request)

Common Features

The PSD servo drives support the following feedback systems (choose by configuration):

- DSL (Single or Multiturn) Single cable solution
- Resolver
- 1 Vpp Rotary and Linear Encoders
- Incremental TTL Encoders
- EtherCAT / PROFINET / Ethernet/IP
- Quick and simple wiring
- Removable SD card
- Same software functionalities for standalone drive and multi-axis servo system

Applications

- Packaging machines
- Material forming machines
- Handling machines
- General automation

PSD Overview

Communications

The support of all common Fieldbus interfaces is an essential feature of open systems. The PSD is based on the modern Ethernet based interfaces such as EtherCAT, PROFINET and Ethernet IP.



Feedback Systems

The PSD servo drives support the following feedback systems:

- DSL (Single or Multiturn) Single cable solution
- Resolver
- 1 Vpp Rotary and Linear Encoders
- Incremental TTL Encoders
- Analog hall

All different Feedbacks can be used on identical hardware, kind of feedback can be chosen just simple configuration

Note: On all single axis devices the full set of feedback is possible, and can be chosen by configuration. On double and triple axis modules either DSL or resolver can be configured.

The PSD is available in two versions:

B: Basic

The drive is used as slave on various field busses communicating via state machines

C: Programmable

This drive version is fully programmable via IEC 61131 and offers the full set of programming languages and a complete set of function blocks incl DS402 and Profidrive state machine

High speed communication

- Communication over Ethernet
- Onboard connection




Inputs / Outputs

- PSD offers 4 fast digital inputs and 2 digital outputs per axis.
- Connection via fast and simple push-in direct plug-in technology.



Motor Feedback

- Resolver, 1Vpp, TTL




Quick and Simple Wiring

- Single cable connection between drive and SMH motor
- Reduction in wiring costs
- Increase reliability



Reduce machine footprint

- Up to 3 axis in one single housing
- Reduce the size of the cabinet
- Electronics footprint is up to 40 % smaller than traditional solutions

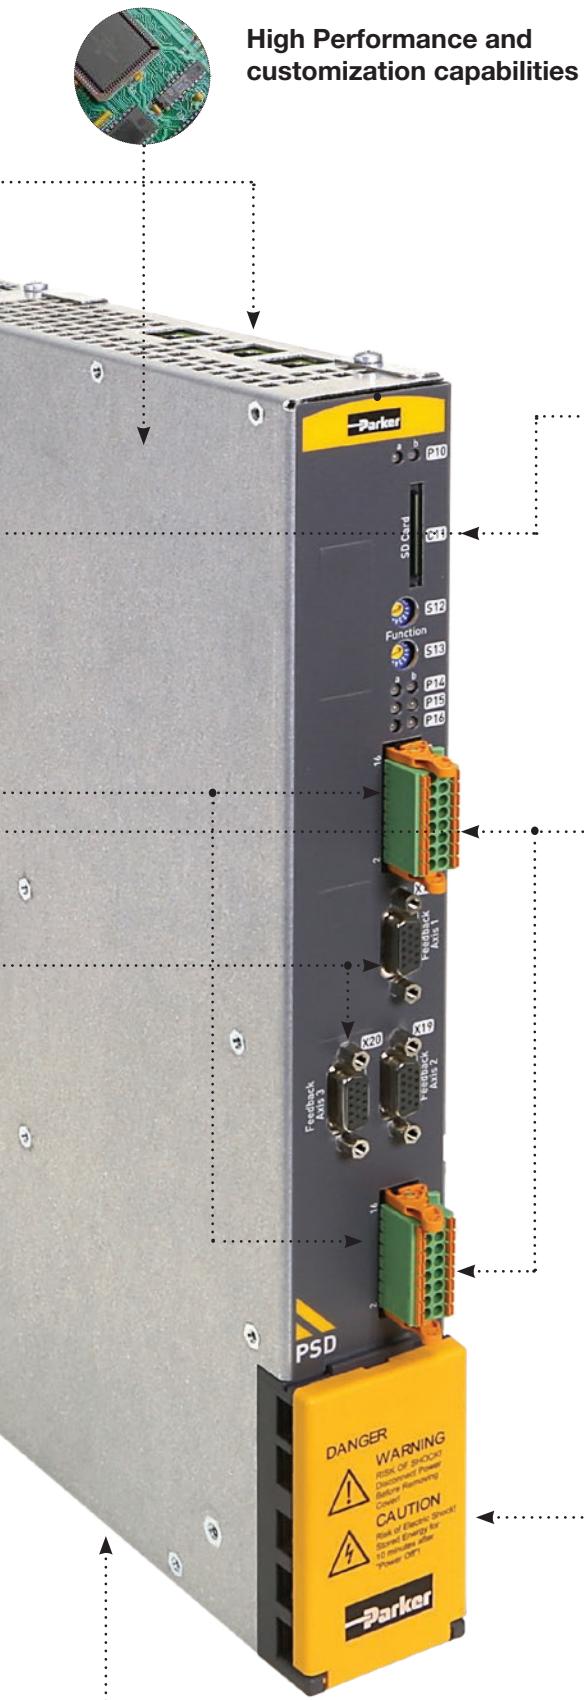

High Performance and customization capabilities

- Autotuning
- Observer technology
- Anti resonance adjustments, vibration suppression, notch-filter...
- Fast control loops (sample times):
 - Current control 62,5 µs,
 - Speed control 125 µs,
 - Position control 125 µs

Removable SD card

- Easy exchange between drives less than 1 minute
- Software upgrade
- Parameters and application memory

STO Safety Functions reduce time and cost , no need additional cabling

- 2 Safety Torque Off (STO) circuits for 3 axis module (one for axis1 and one for axis 2,3).
- 2 independent Safety Torque Off circuits for 2 axis module
- 1 Safety Torque Off circuit for 1 axis module
- Optional Safety Functions over EtherCAT FS0E

DC Bus energy saving

- Energy exchange between drives
- No accessories required

Parker Servo Manager

The set-up and commisioning of the drive can be done easily using the wizard based configuration tool. Parker motors will be recognized by a electronic nameplate.



Wizard-guided configuration and parametrization

Graphical diagnostics / maintenance / service

- Setup mode (absolute / relative movements, homing, jog, ...)
- Adjustable four channel oscilloscope (single / normal / auto / roll)
- Export as image or table (CSV format)
- Autotuning via automated inertia identification
- Enhanced optimization possibilities
- Configurable status overview

Technical Characteristics

Technical Data

PSD1 SW Standalone Axis

	Type	Standalone Axis		
	Input voltage	VAC	3*230 VAC ±10 % 50...60 Hz 1*230 VAC ±10 % 50...60 Hz 30...253 VAC	
	PWM Frequency nom.	kHz	8	8
	Possible PWM frequency	kHz	4 / 8 / 16	4 / 8 / 16
	Continuous current	A	2	5
	Peak current (≤ 2 s)	A	6	15

PSD1 MW Multi-Axis Module

	Type	Single Axis			
	DC Bus voltage	VDC	325...680 VDC ±10 % (Rated voltage 560 VDC)		
	PWM Frequency nom.	kHz	8	8	4
	Possible PWM frequency	kHz	4 / 8 / 16	4 / 8 / 16	4 / 8 / 16
	Continuous current	A	5	8	15
	Peak current (≤ 2 s)	A	10	16	30

	Type	Twin Axis		
	DC Bus voltage	VDC	325...680 VDC ±10 % (Rated voltage 560 VDC)	
	PWM Frequency nom.	kHz	8	8
	Possible PWM frequency	kHz	4 / 8 / 16	4 / 8 / 16
	Continuous current*	A	2 + 2	5 + 5
	Peak current (≤ 2 s)	A	4 + 4	10 + 10

	Type	Triple Axis	
	DC Bus voltage	VDC	325...680 VDC ±10 % (Rated voltage 560 VDC)
	PWM Frequency nom.	kHz	8
	Possible PWM frequency	kHz	4 / 8 / 16
	Continuous current*	A	2 + 2 + 2
	Peak current (≤ 2 s)	A	4 + 4 + 4

*with an continuous limit current at 16A max. by module

PSD1-MW-P - Power Supply Unit

Mains Supply

Power Supply Type	Unit	PSD1 MW P010	with IND-0001-02*	PSD1 MW P020	with IND-0002-0x*
Input Voltage		3*230 ... 480 VAC ±10 % 50...60 Hz (Rated voltage 3*400 VAC)			
Output Voltage		325...680 VDC ±10 % (Rated voltage 560 VDC)			
Supplied Voltage	[VAC]	230	400	480	230
Output Power	[kVA]	6	10	10	9
Peak Output Power (<5 s)	[kVA]	12	20	20	18
		30	30	24	40
		40	40	40	36
		36	60	60	60
		60	60	60	60

Control Supply

Rated Input Voltage		24 VDC ±10 %
Maximum Ripple		1 V _{pkpk}
Supply Current	[A]	0.2 A
		0.8 A
		0.3 A
		0.3 A

⁽¹⁾ Operation of the P010 and P020 power supplies with additional line choke (to be ordered separately).

Environmental Characteristics


Operating Temperature	0...+40 °C
Storage Temperature	-25 °C...+70 °C
Shipping Temperature	-25 °C...+70 °C
Product Enclosure Rating	IP20 (only in closed electrical cabinet) UL open type equipment
Altitude	1000 m ASL. Derate output current by 1.0 % per 100 m to a maximum of 2000 m
Operating Humidity	Class 3K3 - Maximum 85 % non-condensing
Storage Humidity	Class 1K3 - Maximum 95 % non-condensing
Shipping Humidity	Class 2K3 - Maximum 95 % at 40 °C
Operating Vibration	IEC60068-2-6 10...57 Hz width 0.075 mm 57...150 Hz accel. 9.81 m/s ²

Standards & Conformance

2006/95/EC	Low voltage directive
EN 60204-1	Safety of machinery - Electrical equipment of machines - Part 1: General requirements
EN 61800-5-1	Adjustable speed electrical power drive systems - safety requirements, thermal and energy
UL	Power Conversion Equipment UL508C
2004/108/EC	EMC directive
EN 61800-3	Adjustable speed electrical power drive systems - Part 3: EMC product standard including specific test method
STO	Performance Level PL=e according to EN ISO 13849

Dimensions


Type	H [mm]	H1 [mm]	H2 [mm]	W [mm]	D [mm]	Weight [kg]
PSD1-SW	235	225	200	50	180	1.8
PSD1-MW 1/2/3 axes	432	405	360	50	263	4.3
PSD1-MW Single axis 30 A	432	405	360	100	263	8.6
PSD1-MW-P-010	432	405	360	50	263	3.6
PSD1-MW-P-020	432	405	360	100	263	5.4

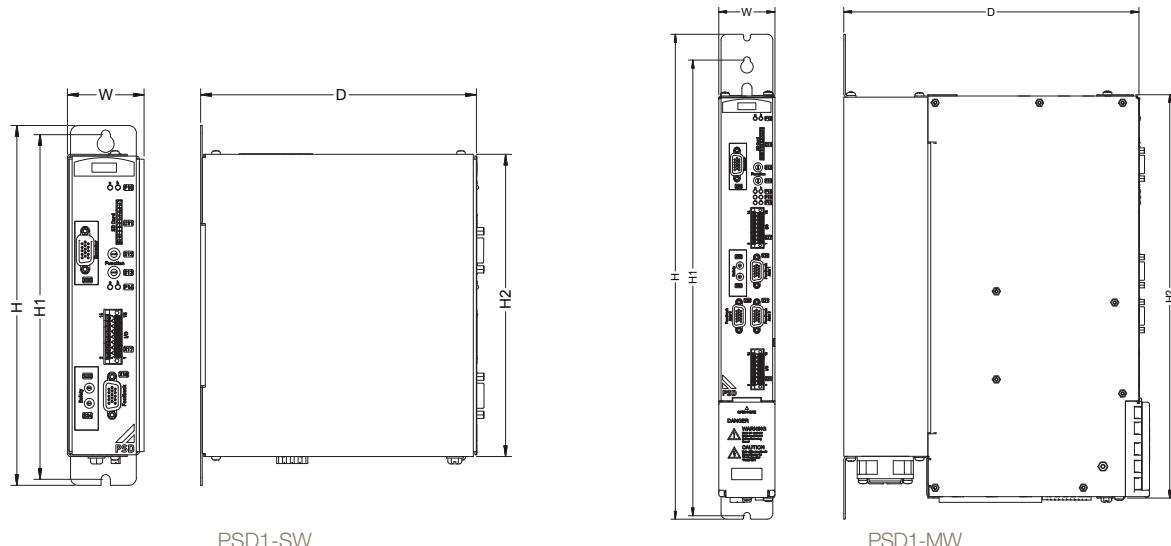


Specific Functionalities

Safety configuration

The Parker Servo Drives have featured "Safe Torque Off" (STO) as standard function, helping to protect users and machinery against unexpected motor start-up. Performance Level PL=e according to EN ISO 13849. In order to fulfil the new machinery directive 2006/42/EG, the PSD can be equipped with a safety option board. The system does not need any additional wiring, as the Functional Safety over EtherCAT (FSoE) uses the existing wiring.

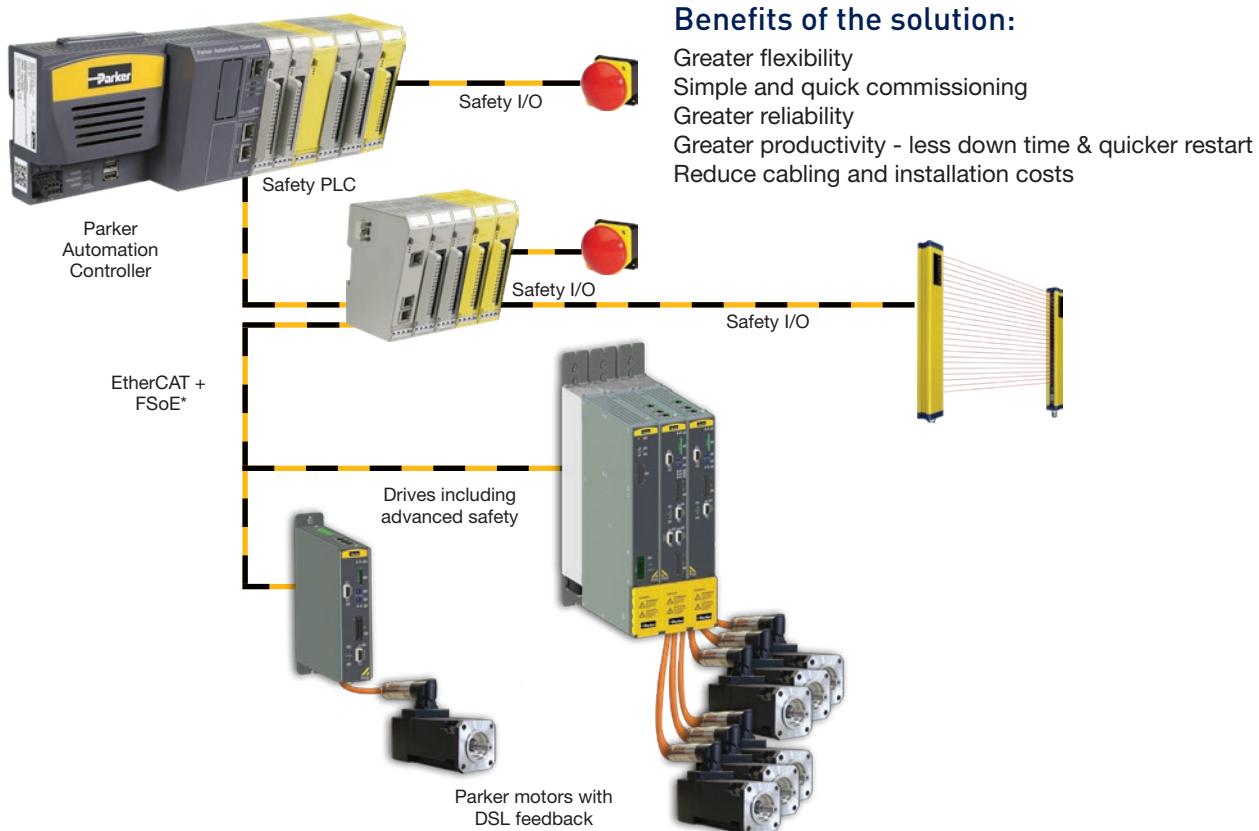


The Safety option board offers following safety functions:

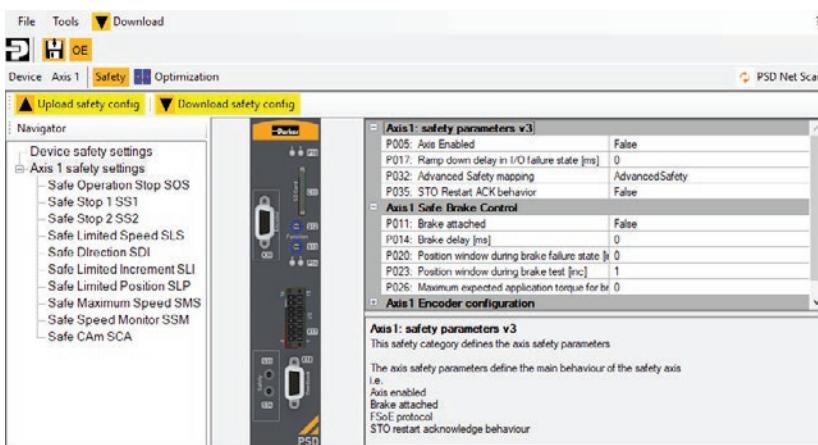


Besides the functionality shown in the picture it is possible to choose the STO either as hardwired input or via FSoE. Safe Brake Control is available as well.

A few examples for the safety functions:


STO: Safe Torque Off

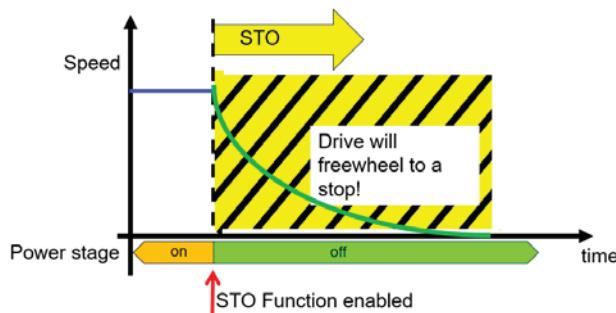


SS1: Safe Stop 1

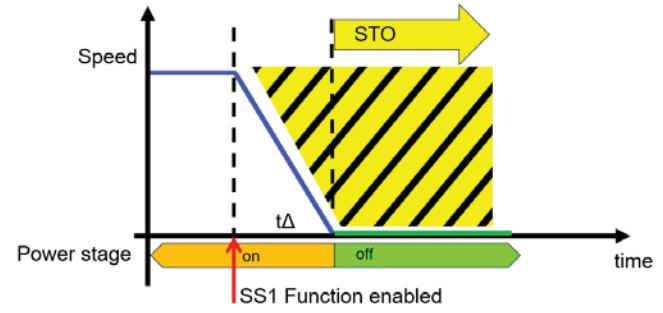


SLS: Safe Limited Speed

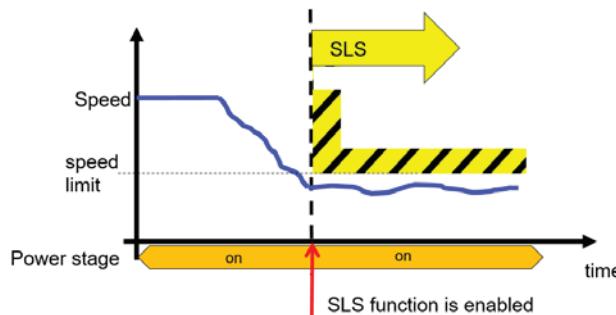

SS2: Safe Stop 2

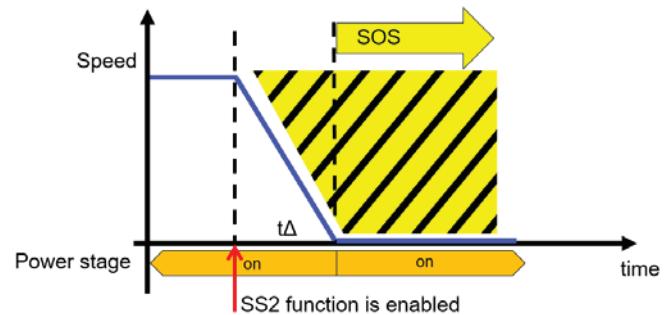

SOS: Safe Operating Stop

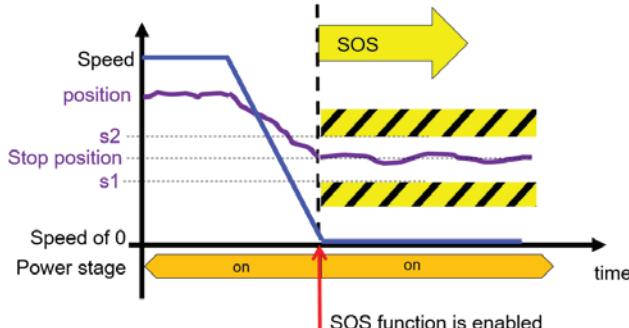

Programmable Version

Programming

- According to IEC 61131-3
- Using at least CODESYS 3.5.15
- PLC Project management with Parker Servo Manager (Drive cloning, import & export)
- Profile State Machine Function block (Called up in IEC cycle)

Technical Specifications

- Up to 3 PLC Tasks + one fast PLC Task (500µs)
- 500 * 16 Bit Variables / BOOL, INT, WORD
- 150 * 32 Bit Variables / DINT, DWORD, TIME, REAL
- 352 Recipe Variables (axis specific) / 32 columns and 11 rows (3 x LREAL, 4 x DINT, 2 x INT, 1xLINT, 1xSTRING)

IEC 61131-3 standard modules



- Up to 8 timers (TON, TOF, TP)
- Triggers (R_TRIGGER, F_TRIGGER)
- Flip-flops (RS, SR)
- Counters (CTU, CTD, CTUD)

Device specific functions modules

- PSD_Input: Generates an input process image
- PSD_Output: Generates an output process image
- PSD_RecipeTable: Acces to recipe table

PLCopen function modules

- Positioning: absolute, relative, additive, continuous
- Machine zero
- Stop, energizing the powerstage, reset error
- Position, device status, read axis error
- Electronic gearing (MC_Gearin)
- Digital I/O control (4I/2O per axis)



Programming language


Text languages

- Structured text (ST)
- Instruction List (IL)

Graphical languages

- Ladder Diagram (LD)
- Function Block Diagram (FBD)
- Sequential Function Chart (SFC)
- Continuous Function Chart (CFC)

IEC Programme example in CFC

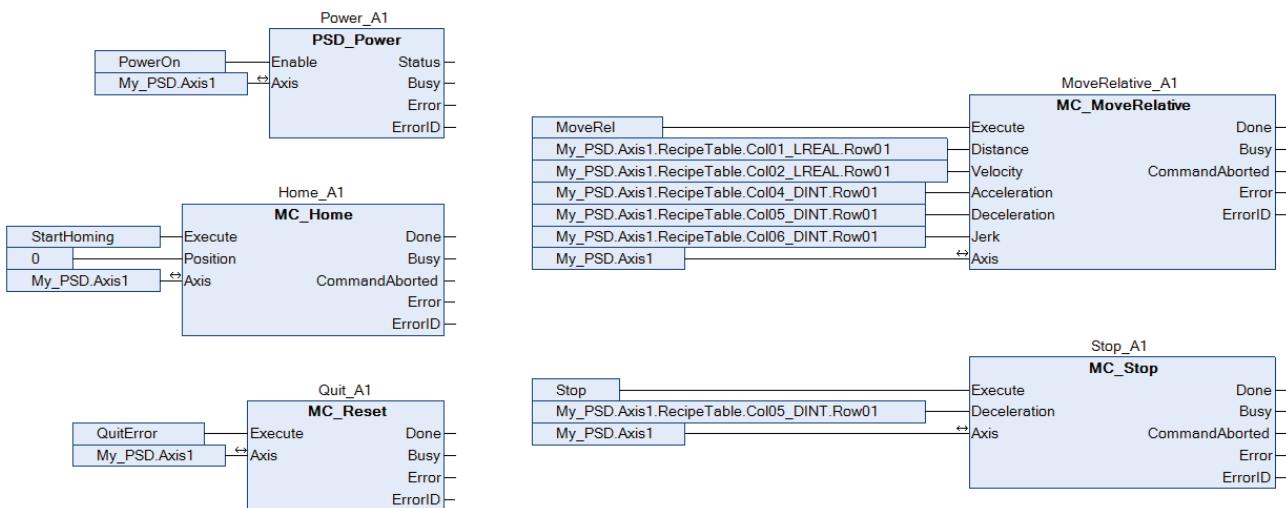

Order Code

Parker Servo Drive PSD

Order example	1	2	3	4	5	6	7	8	9	10	11
	PSD1	M	W	3	433	B	1	1	0	0	000

1 Drive Family	6 Technology
PSD1 Parker Servo Drive	B Basic
2 Device Type	C Programmable ³⁾
S Standalone 230VAC	
M Multi-axis 400VAC	
3 Mounting Type	7 Interface
W Wall mounting	1 EtherCAT
4 Device Type	2 EtherCAT, PROFINET, Ethernet/IP
1 One powerstage	
2 Two powerstages	
3 Three powerstages	
P Power module	
5 Device Type	8 Feedback
PSD1SW1 Standalone	1 DSL®
200 2 Ampere	2 DSL®, Resolver, Encoder (1 Vss) ¹⁾ , Encoder A/B (TTL) ¹⁾ , Analog Hall (1 Vss) ¹⁾ ,
300 5 Ampere	
PSD1MW1 One powerstage	
300 5 Ampere	
400 8 Ampere	
600 15 Ampere	
800 30 Ampere	
PSD1MW2 Two powerstages	
220 2 + 2 Ampere	
330 5 + 5 Ampere	
440 8 + 8 Ampere	
PSD1MW3 Three powerstages	
222 2 + 2 + 2 Ampere	
433 8 + 5 + 5 Ampere	
PSD1MWP Passive power supply	
010 10 kVA	
020 20 kVA	
9 Option 1	11 Customisation
0 No option	000 Non customized
1 Functional Safety over Ethercat ²⁾	
10 Option 2	
0 No option	

¹⁾ Only for PSD1-S and first power stage of multi-axis unit PSD1MW1 ...

²⁾ Only available with Interface 1: EtherCAT and Feedback 1: Hiperface DSL®

³⁾ Available with combination 11 (EtherCAT, DSL) and 22 (Multi Fieldbus, Multi Feedback)

Accessories

Braking Resistors	Description	Compatible with
ACB-0004-01	0.1kW	PSD1SW1200/300
ACB-0005-01	0,12kW	PSD1SW1200/300
ACB-0001-01	0.50kW	PSD1MWP010
ACB-0002-01	0.50kW	PSD1MWP020
ACB-0003-01	1.50kW	PSD1MWP020

Motor Choke	Description	Compatible with
ECM-0005-01	1mH; 7A; Motor Cable Length >50m	PSD1SW1200/300
ECM-0004-01	3,6mH; 6,3A; Motor Cable Length >50m	PSD1MW1/2/3
ECM-0001-01	2mH; 16A; Motor Cable Length >50m	PSD1MW1
ECM-0002-01	1,1mH; 30A; Motor Cable Length >50m	PSD1MW1

Mains Filters	Description	Compatible with
ECP-0001-01	Single phase; Motor Cable Length >10m	PSD1SW1200/300
ECP-0002-01	3 phase; Motor Cable Length >10m	PSD1SW1200/300
ECP-0003-01	Motor Cable Length < 6*10m	PSD1MWP010
ECP-0003-02	Motor Cable Length < 6*50m	PSD1MWP010
ECP-0003-03	Motor Cable Length < 6*50m	PSD1MWP020

Fieldbus Accessories	Description	Compatible with
CBD000C0-T00-T00-0002-00	EtherCAT cable	PSD1MWP010
CBD000C0-T00-T00-0005-00	EtherCAT cable	PSD1MWP020
CBD000C0-T00-T00-0010-00	EtherCAT cable	PSD1MWP020

Mains Choke	Description	Compatible with
IND-0001-02	0,86mH; 30A; UL	PSD1MWP010
IND-0002-01	0,45mH; 55A	PSD1MWP020
IND-0002-02	0,45mH; 55A; UL	PSD1MWP020

Resolver cables

Item number	Description
CBFRE0H0-C06-D03-0030-00	Cable Resolver Highflex 3,0m
CBFRE0H0-C06-D03-0050-00	Cable Resolver Highflex 5,0m
CBFRE0H0-C06-D03-0070-00	Cable Resolver Highflex 7,0m
CBFRE0H0-C06-D03-0100-00	Cable Resolver Highflex 10,0m

DSL cables

Item number	Description
CBM007HD-M15-PSX-____-00	Motor Power Cable DSL [0.75mm ²], M15 Motor Connector for PSD1S
CBM007HD-M23-PSX-____-00	Motor Power Cable DSL [0.75mm ²], M23 Motor Connector for PSD1S
CBM015HD-M23-PSX-____-00	Motor Power Cable DSL [1.5mm ²], M23 Motor Connector for PSD1S
CBM007HD-M15-PMX-____-00	Motor Power Cable DSL [0.75mm ²], M15 Motor Connector for PSD1M
CBM007HD-M23-PMX-____-00	Motor Power Cable DSL [0.75mm ²], M23 Motor Connector for PSD1M
CBM015HD-M23-PMX-____-00	Motor Power Cable DSL [1.5mm ²], M23 Motor Connector for PSD1M
CBM025HD-M23-PMX-____-00	Motor Power Cable DSL [2.5mm ²], M23 Motor Connector for PSD1M
CBM040HD-M23-PMX-____-00	Motor Power Cable DSL [4.0mm ²], M23 Motor Connector for PSD1M
CBM040HD-M40-PMX-____-00	Motor Power Cable DSL [4.0mm ²], M40 Motor Connector for PSD1M
CBM060HD-M40-PMX-____-00	Motor Power Cable DSL [6.0mm ²], M40 Motor Connector for PSD1M

Motor power cables

Item number	Description
CBM015HB-C02-D01-0030-00	Motor Power Cable 1.5mm ² 3,0m
CBM015HB-C02-D01-0050-00	Motor Power Cable 1.5mm ² 5,0m
CBM015HB-C02-D01-0070-00	Motor Power Cable 1.5mm ² 7,0m
CBM015HB-C02-D01-0100-00	Motor Power Cable 1.5mm ² 10,0m
CBM025HB-C02-D01-0030-00	Motor Power Cable 2.5mm ² 3,0m
CBM025HB-C02-D01-0050-00	Motor Power Cable 2.5mm ² 5,0m
CBM025HB-C02-D01-0070-00	Motor Power Cable 2.5mm ² 7,0m
CBM025HB-C02-D01-0100-00	Motor Power Cable 2.5mm ² 10,0m

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, St. Florian
Tel: +43 (0)7224 66201
parker.austria@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/NL/LU – Benelux,
Hendrik Ido Ambacht
Tel: +31 (0)541 585 000
parker.nl@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Piraeus
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs
Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IL – Israel
Tel: +972 2 45 19 21
parker.israel@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easternurope@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Borås
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, São José dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Toluca
Tel: +52 72 2275 4200

EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

