


PRE-ASSEMBLED EDGES

Standard version; length upon customer's request with **pre-assembled sensor and aluminium support.**

Models available: Type B0, Type B1N, Type B2N.

EDGE TYPE "B0"

Profile made of black EPDM. It ensures maximum sensitivity to activation. Particularly suitable as an emergency button or as an alternative to emergency wire micro switching.
Supplied with both side adhesive tape for wall fixing.
The edges of the profile are sealed with polyurethane resin to ensure better watertight property.



For the edge type "B0", the outlet cable can only be on the head side.

Different lengths of the cable available upon request (please indicate when ordering).


N.B. The product cannot be used as safety function

HOW TO ORDER AN EDGE TYPE "B0"

Code

GSB0 = Gamma System Edge "B0"

Cavo = S: standard, 3 m long
1: special version

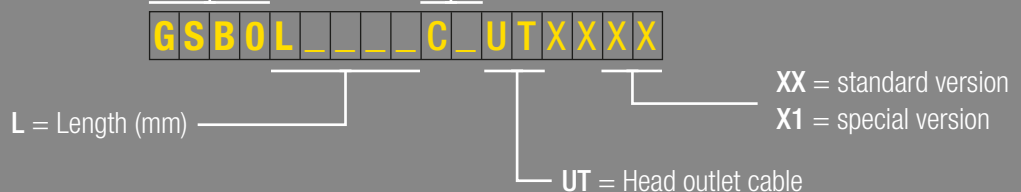

CABLE

S: CS - Standard cable 4x0.35 mm² FROR 300/500, 3 m in length

1: For lengths other than the standard one, please indicate the cable length, e.g. 10 m = **C10**.

Example 1: edge type "B0" 1000 mm in length with standard cable, e.g. 10 m = C10.

GSBOL1000CSUTXXXX (profile Type "A") sensitive area 910x910 mm

Example 2: edge type "B0" 1000 mm in length with cable 10 m in length and with 4-pole, M8 male connector.

GSBOL1000C10UTXX1