

BEVPOR PH WINE

Filter Cartridges



BEVPOR PH wine filters protect the unique characteristics of wine by removing yeast and other spoilage organisms to ensure microbial stabilization prior to packaging.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms whilst preserving the wine's unique properties to ensure it reaches the consumer as the winemaker intended. Combined with hydrophilic properties for easy integrity testing, BEVPOR PH filters provide assured performance throughout their service life.

The incorporation of an integral pre-filter layer, combined with an increased filtration area provides high wine flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to the microbial stabilization of wine by providing increased process control with maximized operational efficiency.


Features

- Validated retention to wine spoilage organisms
- Inert materials of construction
- Easily integrity tested in situ
- Integral depth pre-filtration layer
- High filtration area


Benefits

- Ensures effective microbial stabilization of wine
- Protects the desirable characteristics of the wine
- Assures performance of the filtration
- Increased throughput to blockage
- High wine flow and maximized operational efficiency

Performance Characteristics

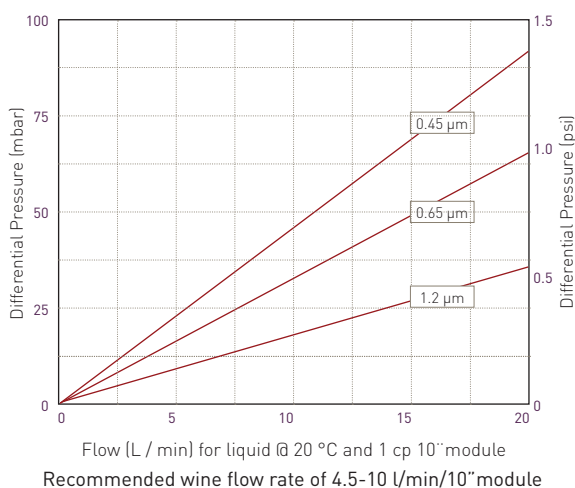

Filtration Stage

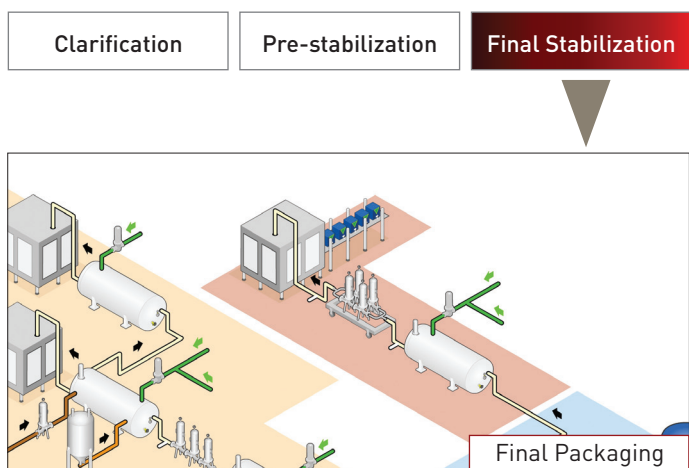



Specifications

Materials of Construction

- Filtration Membrane: Polyethersulphone
- Prefilter Layer: Polyester
- Upstream Support: Polyester
- Downstream Support: Polyester
- Inner Support Core: Polypropylene
- Outer Protection Cage: Polypropylene
- End Caps: Nylon
- End Cap Insert: 316L Stainless Steel
- Standard o-rings: Silicone

Food Contact Compliance

Materials conform to the relevant requirements of 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C and ISO10993 equivalents.



Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP	
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean in Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PH filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²		
	0.45	0.65	1.2
<i>Saccharomyces cerevisiae</i>	FR	FR	FR
<i>Brettanomyces bruxellensis</i>	FR	FR	FR
<i>Lactobacillus brevis</i>	FR	FR	2.0
<i>Acetobacter oeni</i>	FR	FR	7.6
<i>Pseudomonas aeruginosa</i>	9.1	8.9	4.8
<i>Serratia marcescens</i>	FR	FR	2.4

*FR - Fully retentive during challenge

Integrity Test Data

All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micron Rating		
	0.45	0.65	1.2
Test Pressure (barg)	1.4	1.0	0.6
Test Pressure (psig)	20.0	15.0	9.0
Max Diffusional Flow per 10" (ml/min)	21.0	21.0	21.0

Manufacturing Traceability

Each filter element displays the product description, product code and lot number. Additionally each filter module displays a unique serial number providing full manufacturing traceability.

Ordering Information

BPH	-		-		A		
Code	Length (Nominal)	Code	Micron	Code	Endcap (10 inch)	Code	O-rings
1	10" (250 mm)	04	0.45 µm	C	Fin / 226 Bayonet	S*	Silicone
2	20" (500 mm)	06	0.65 µm	D	Fin / 222	E	EPDM
3	30" (750 mm)	12	1.2 µm	E	Flat Top / 222	*Silicone O-rings supplied as standard	
4	40" (1000 mm)			R	BF / 222 Bayonet		

VSH & HSL range of Sanitary Beverage Housings



- Multi and single elements
- Designed specifically for the food & beverage industry
- 0.4µM Ra internal, 0.25µM Ra external
- High quality crevice free construction
- Available for up to 30 round filters
- Sanitary vent, tri-clamp connections as standard
- Sanitary body closure as standard