

GXS Series Explosion proof limit switches EExd



Features

- II 2 G EExd IIC T6
- KEMA 00 ATEX 2103 X
- Conforms to EN50014, EN50018, CE marked.
- EN50047 mounting compatible.
- Rugged zinc die-cast housing.
- Pre-wired - 5 metres of cable.
- Bottom exit cable ONLY.
- Double insulated switch element
- Snap action basic switch

Benefits

- Flameproof protection
- Meets product design and quality systems requirements of ATEX 94/9/EG, mandatory 2003.
- Standard European mounting.
- Suitable for difficult operating environments.
- Fast and easy to install.
- Fully potted cable and basic switch.
- External earth connection not required.
- Change over, 3 wire device, 1NC/1NO

Description

The GXS series explosion proof limit switches are designed specifically for use in hazardous applications. The GXS enclosure is fully potted and has sealing protection of IP66/67 as per IEC/EN 60529. The entire series GXS complies with the European Directive on Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres (94/9/EC) commonly referred to as the ATEX Directive.

Typical applications

- Hazardous areas Category 2 (Zone 1) or Category 3 (Zone 2).
- Petrochemical
- Material handling
- Valve

Zone Classification			
Category	Flammable atmospheres	Protection required	Requirements for equipment
2	Medium risk of an explosive atmosphere occurring Gas = Zone 1	High	Equipment is capable of operating safely under a single fault condition (ib) or alternatively one or more types of suitable protection is used. For example, 'd', 'e', 'p' etc.
3	Low risk of an explosive atmosphere occurring Gas = Zone 2	Normal	Equipment for safe use in normal operation, typically (Ex n) equipment.



WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalogue) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.



Failure to comply with these instructions could result in death or serious injury.

GXS Series

Explosion proof limit switches

Technical information

Specifications

Mechanical life:	up to 2 million operations
Degree of protection:	IP66/67, EN 60529
Operating temperature:	-20 °C to 75 °C @ 3 A (-4 °F to 167 °F @ 3 A) -20 °C to 60 °C @ 4 A (-4 °F to 140 °F @ 4 A)
Standards/approvals:	EN 50014: 1997 EN 50018: 1994 CE marked  II 2 G EExd IIC T6  KEMA 00 ATEX 2103 X (‘X’ indicates special conditions for safe use, see certificate)
Electrical rating:	AC15, DC13 ac (Ue): 250 V 4 A dc (Ue): 250 V 0.15 A 1NC/1NO change over contacts Double insulated switch element No internal or external earth connection
Contact material:	Silver
Cable/enclosure:	HO5VV-F, 3 core x 0,75 mm ² Black (BK) - common Blue (BU) - NC Brown (BN) - NO Fully potted enclosure
Shock:	50 g - IEC 68-2-27
Vibration:	10 g - IEC 68-2-6

Order guide


Description	Catalogue Listing
Side Rotary Lever	GXE51A1B
Top Pin Plunger	GXE51B
Top Roller Plunger	GXE51C

GXS Series


Explosion proof limit switches

Mounting drawings (in mm)


GXE51A1B

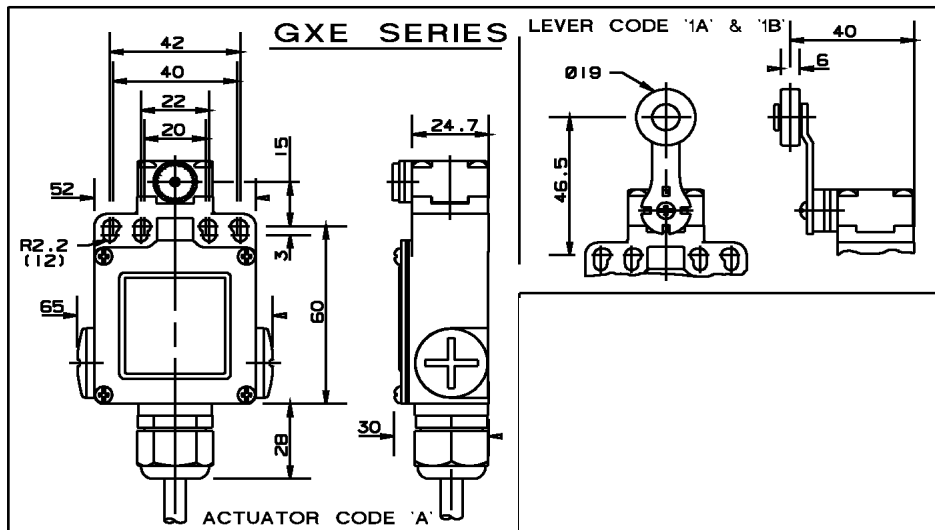

GXE51B

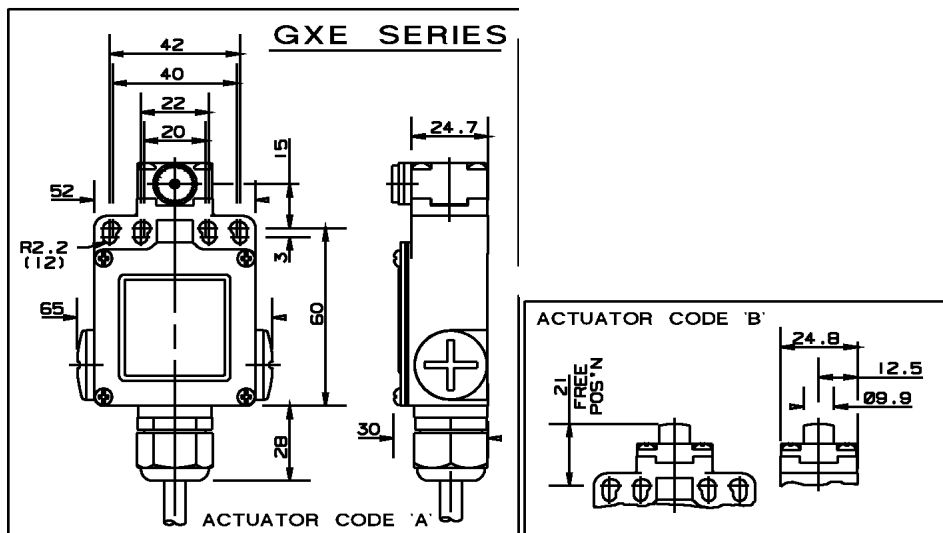

GXE51C

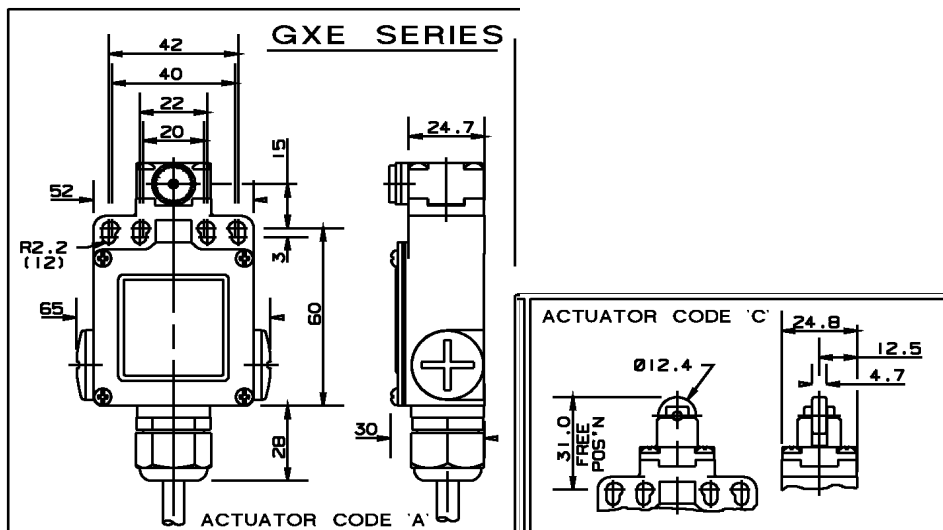

Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective material and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during that period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and **is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.**

While we provide application assistance, personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change at any time without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

Sales and Service

Honeywell serves its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or name of the nearest Authorised Distributor, contact your local sales office or: INTERNET: www.honeywell.com/sensing
E-mail: info.sc@honeywell.com

ASIA PACIFIC

Sensing & Control

Asia Pacific Headquarters

Phone: +(65) 355-2828
Fax: +(65) 445-3033

Australia

Honeywell Limited
Phone: +(61) 2-9370-4500
FAX: +(61) 2-9370-4525
Toll Free 1300-36-39-36
Toll Free Fax: 1300-36-04-70

China – PRC - Beijing

Honeywell China Inc.
Phone: +(86-10) 6561-0208
Ext. 205
Fax: +(86-10) 6561-0618

China – PRC - Shanghai

Honeywell China Inc.
Phone: +(86-21) 6354-9181
Fax: +(86-21) 6354-2248

China - Hong Kong S.A.R.

Honeywell Ltd.
Phone: +(852) 2331-9133
Fax: +(852) 2331-9998

China – PRC - Chengdu

Honeywell China Inc.
Phone: +(86-28) 6786-348
Fax: +(86-28) 6787-061

China – PRC - Guangzhou

Honeywell China Inc.
Phone: +(86-20) 3879-1169
Fax: +(86-20) 3879-1269

China – PRC - Shenzhen

Honeywell China Inc.
Phone: +(86) 755-518-1226
Fax: +(86) 755-518-1221

Indonesia

Honeywell Indonesia Pte Ltd.
Phone: +(6221) 521-3330
FAX: +(6221) 521-3735

India

TATA Honeywell Ltd.
Phone: +(91) 20 6875-532 /
6875 534
Fax: +(91) 20 6875-992

Japan

Honeywell Inc
Phone: +(81) 3 5440 1395
Fax: +(81) 3 5440 1314

South Korea

Honeywell Korea Co Ltd
Phone: +(822) 799-6114
Fax: +(822) 792-9011

Malaysia

Honeywell Engineering Sdn
Bhd
Phone: +(60-3) 7958-4988
Fax: +(60-3) 7958-8922

New Zealand

Honeywell Limited
Phone: +(64-9) 623-5050
Fax: +(64-9) 623-5060
Toll Free (0800) 202-088

Philippines

Honeywell Systems
(Philippines) Inc.
Phone: +(63-2) 636-1649
Fax: +(63-2) 636-1650

Singapore

Honeywell South East Asia
Phone: +(65) 355-2828
Fax: +(65) 445-3033

Thailand

Honeywell Systems (Thailand)
Ltd.
Phone: +(662) 693-3099
FAX: +(662) 693-3085

Taiwan R. O. C.

Honeywell Taiwan Ltd.
Phone: +(886-2) 2245-1000
FAX: +(886-2) 2245-3242

EUROPE

Austria

Honeywell Austria GmbH
Phone: +(43) 1 727 80 366/246
FAX: +(43) 1 727 80 337

Belgium

Honeywell SA/NV
Phone: +(32) 2 728 2522
FAX: +(32) 2 728 2502

Bulgaria

Honeywell EOOD
Phone: +(359) 2 79 40 27
FAX: +(359) 2 79 40 90

Czech Republic

Honeywell spol. s.r.o.
Phone: +(420) 2 6112 3469/
3424
FAX: +(420) 2 6112 3461

Denmark

Honeywell A/S
Phone: +(45) 39 55 55 55
FAX: +(45) 39 55 55 58

Finland

Honeywell OY
Phone: +(358) 9 3480101
FAX: +(358) 9 34801375

France

Honeywell SA
Phone: +(33) 1 60 19 82 68
FAX: +(33) 1 60 19 81 73

Germany

Honeywell AG
Phone: +(49) 69 8064 444
FAX: +(49) 69 8064 442

Hungary

Honeywell Kft.
Phone: +(36 1) 451 4300
FAX: +(36 1) 451 4343

Italy

Honeywell S.p.A.
Phone: +(39) 02 92146 450/
456
FAX: +(39) 02 92146 490

The Netherlands

Honeywell B.V.
Phone: +(31) 20 565 69 11
FAX: +(31) 20 565 66 00

Norway

Honeywell A/S
Phone: +(47) 66 76 20 00
FAX: +(47) 66 76 20 90

Poland

Honeywell Sp. zo.o
Phone: +(48) 22 606 0900
FAX: +(48) 22 606 0901

Portugal

Honeywell Portugal Lda
Phone: +(351 21) 424 50 00
FAX: +(351 21) 424 50 99

Romania

Honeywell Bucharest
Phone: +(40) 1 2110076
FAX: +(40) 1 2103375

Commonwealth of Independent States (CIS)

Z.A.O. Honeywell
Phone: +(7 095) 796 98 36
FAX: +(7 095) 796 98 93

Slovak Republic

Honeywell s.r.o.
Phone: +(421 7) 58247 403/
400
FAX: +(421 7) 58247 415

South Africa (Republic of)

Honeywell Southern Africa
Honeywell S.A. Pty. Ltd
Phone: +(27) 11 805 1211
FAX: +(27) 11 805 1354

Spain

Honeywell S.A.
Phone: +(34) 91 313 6100
FAX: +(34) 91 313 6129

Sweden

Honeywell AB
Phone: +(46) 8 775 55 00
FAX: +(46) 8 775 56 00

Switzerland

Honeywell AG
Phone: +(41) 1 855 24 40
FAX: +(41) 1 855 24 45

Turkey

Honeywell Turkey A.S.
Phone: +(90) 216 464 4764
FAX: +(90) 216 464 4794

United Kingdom

Honeywell Control Systems Ltd
Phone: +(44) 118 906 2600
FAX: +(44) 118 981 7513

Mediterranean & African Distributors

Honeywell SpA
Phone: +(39) 2 921 46 232
FAX: +(39) 2 921 46 233

Middle East Headquarters

Honeywell Middle East Ltd.
Phone: +(9712) 443 2119
FAX: +(9712) 443 2536

NORTH AMERICA

Canada

Honeywell LTD
Phone: 1-800-737-3360
FAX: 1-800-565-4130

USA

Honeywell
Sensing and Control,
International Headquarters
Phone: 1-800-537-6945
1-815-235-6847
FAX: 1-815-235-6545
E-mail: info.sc@honeywell.com

LATIN AMERICA

Argentina

Honeywell S.A.I.C.
Phone: +(54-11) 4383-3637
FAX: +(54-11) 4325-6470

Brazil

Honeywell do Brasil & Cia
Phone: +(55-11) 7266-1900
FAX: +(55-11) 7266-1905

Chile

Honeywell Chile, S.A.
Phone: +(56-2) 233-0688
FAX: +(56-2) 231-6679

Columbia

Honeywell Columbia, S.A.
Phone: +(57-1) 623-3239/3051
FAX: +(57-1) 623-3395

Ecuador

Honeywell S.A.
Phone: +(593-2) 981-560/1
FAX: +(593-2) 981-562

Mexico

Honeywell S.A. de C.V.
Phone: +(52-5) 259-1966
FAX: +(52-5) 570-2985

Puerto Rico

Honeywell Inc.
Phone: +(809) 792-7075
FAX: +(809) 792-0053

Venezuela

Honeywell CA
Phone: +(58-2) 238-0211
FAX: +(58-2) 238-3391

This publication does not constitute a contract between Honeywell and its customers. The contents may be changed at any time without notice. It is the customer's responsibility to ensure safe installation and operation of the products. Detailed mounting drawings of all products illustrated are available on request.
© Honeywell 2000. All rights reserved.

Honeywell

Honeywell Control Systems Ltd

Newhouse Industrial Estate

Motherwell ML1 5SB

Scotland, UK

www.honeywell.com/sensing