



2/2-way solenoid valve
 NC - Valve normally closed (as standard)
 NO - Valve normally open (as option)

Force-pilot operated piston valve
 No differential pressure is necessary for operation.
 In standard (NC) the valve closes with spring power.

■ Solenoid valve for extended temperature range

TECHNICAL SPECIFICATIONS

Type of control	Force-pilot operated, no pressure difference necessary
Design	Piston design
Connection	Sleeve connection G1/4 - G2 DIN ISO 228/1 (BSP) Further connections like NPT on request
Installation	Actuator upright
Pressure	0 - 40 bar (see table on page 2)
Medium	Clean, neutral gaseous and liquid media
Max. viscosity	22 mm ² /s
Temperature range	Medium: -40 °C / +200 °C Environment: -40 °C / +50 °C Taking into account other influencing parameters
Body material	Brass 2.0402 Stainless steel 1.4581
Metallic inner parts	Brass and st. steel
Sealing	PTFE
Supply voltage	AC~ 24V, 110V, 230V via external rectifier (included in delivery) DC= 12V, 24V Other supply voltages on request
Voltage tolerance	-10% / +10%
Power consumption	T802 = 18 Watt T322 = 21 Watt T242 = 26 Watt T272 = 60 Watt T352 = 80 Watt
Protection class	IP65 according to DIN 60529
Duty factor	100% ED-VDE 0580
Connection type	terminal box



VALVE FEATURES

- For media temperatures up to +200 °C
- No pressure difference is required
- High life time
- High-quality materials
- Reliable and sturdy sealing elements

FUNCTION

NC – non energized closed



NO – non-energized open



CONNECTION DIAGRAM

For AC/DC coils

For DC coils
 w/ integr. rectifier




CERTIFICATES




TECHNICAL FEATURES

G	Seat Ø mm	Kv-value m ³ /h	Standard type	max. pressure for coils				
				T802	T322	T242	T272	T352
1/4	13,5	1,8	.3521/..04/	0-20	0-40	-	-	-
3/8	13,5	4,0	.3522/..04/	0-20	0-40	-	-	-
1/2	13,5	4,5	.3523/..04/	0-20	0-40	-	-	-
3/4	27,5	11,5	.3524/..04/	0-13	0-25	0-40	-	-
1	27,5	13,0	.3525/..04/	0-13	0-25	0-40	-	-
1 1/4	40	29,0	.3526/..04/	-	0-6	0-20	0-40	-
1 1/2	40	33,0	.3527/..04/	-	0-6	0-20	0-40	-
2	50	49,0	.3528/..04/	-	-	0-6	0-25	0-40

The flow rate mentioned in the table applies to the strongest coil.

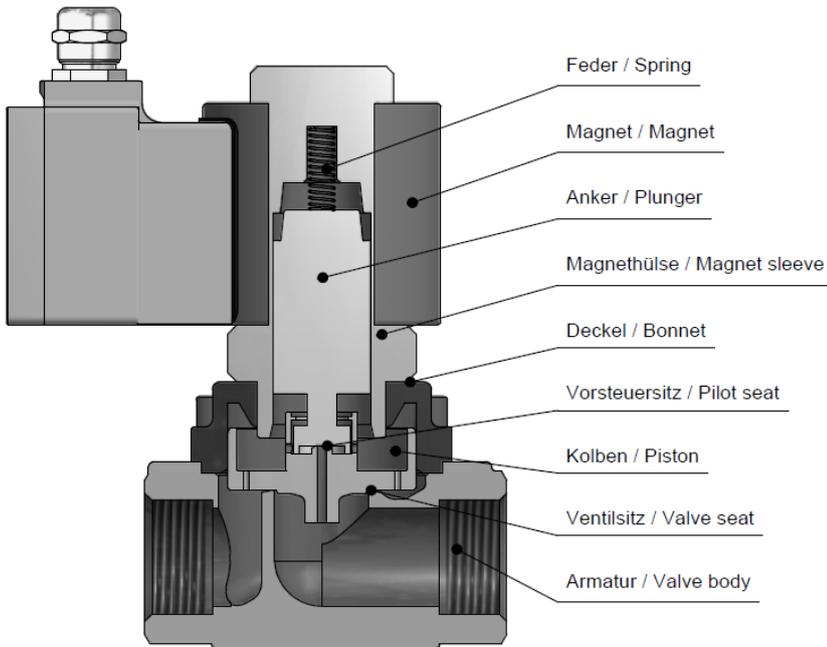

DIMENSIONS

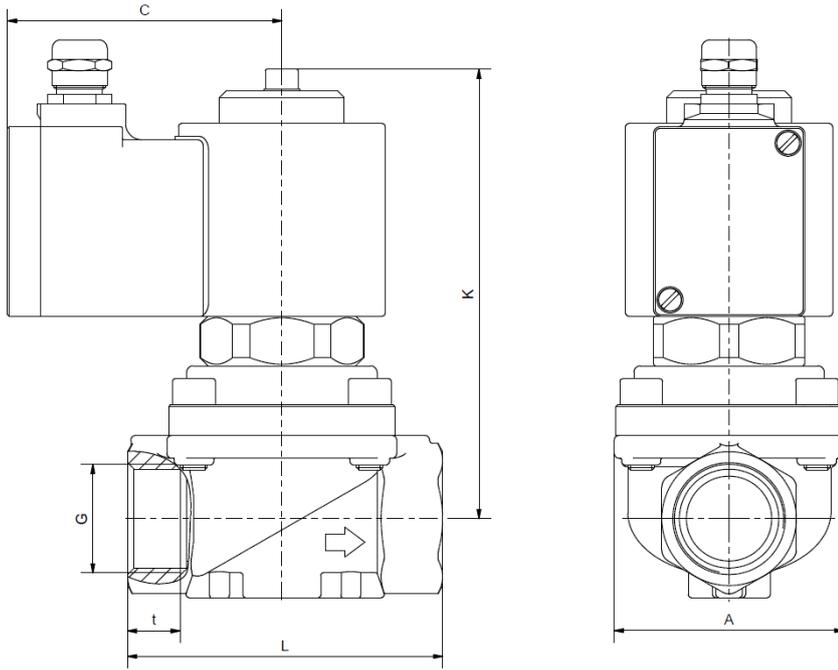

Coil	T802					T322				
Type	3521	3522	3523	3524	3525	3521	3522	3523	3524	3525
G	1/4	3/8	1/2	3/4	1	1/4	3/8	1/2	3/4	1
A	48	48	48	70	70	48	48	48	70	70
C	70	70	70	70	70	77	77	77	77	77
K	104	104	104	122	122	148	148	148	138	138
L	67	67	67	96	96	67	67	67	96	96
t	12	12	12	16	16	12	12	12	16	16
kg	1,5	1,5	1,4	2,3	2,2	2,4	2,3	2,3	3,1	3,0

Coil	T322		T242				T272			T352	
Type	3526	3527	3524	3525	3526	3527	3528	3526	3527	3528	3528
G	1 1/4	1 1/2	3/4	1	1 1/4	1 1/2	2	1 1/4	1 1/2	2	2
A	96	96	70	70	96	96	112	96	96	112	112
C	77	77	93	93	93	93	93	107	107	107	127
K	148	148	178	178	188	188	186	218	218	239	322
L	140	140	96	96	140	140	168	140	140	168	168
t	22	22	16	16	22	22	22	22	22	22	22
kg	4,8	4,7	4,7	4,6	6,5	6,3	7,6	10,1	10,0	11,5	23,5

INFORMATION

- It is imperative to observe the installation and safety instructions in our operating and service manuals.
- Required ordering information: valve type, function NC/NO, pressure range, connection, nominal width, medium, flow rate, medium and ambient temperatures, connection voltage.
- **For information on the heating and performance of solenoid coils, refer to the corresponding "Coils" data sheet.**
- **Detailed production-specific drawings and other technical information will be made available when an order is placed.**

PLEASE NOTE

Each individual application decides which valve type is required, the main factor being the resistance of the materials to the operating medium. The correct selection of materials requires knowledge of the concentration, temperature and degree of contamination of the medium. Other criteria include the operating pressure and max. volumetric flow, since, in addition to high temperatures, high pressures and high flow rates must also be taken into account when selecting the materials.

All materials used for our valves, be it housing, seals or magnets, will be carefully selected in view of the different application areas. Any information given is non-binding and serves for orientation only. No claims under warranty can be derived therefrom.

ORDERING CODE

Type	Connection	Body	Sealing	Coil	Option
. 3 5	2 3	1 0	0 4	T 8 0	2 - T H

21	G 1/4
22	G 3/8
23	G 1/2
24	G 3/4
25	G 1
26	G 5/4
27	G 6/4
28	G 2

08	St.steel 1.4581
10	Brass 2.0402
04	PTFE

80	18 W
32	21 W
24	26 W
27	60 W
35	80 W

2	Standard IP65
---	---------------

TH	+180 °C
EL	+200 °C
NW	normally open

The GSR logo is a registered trademark of GSR Ventiltechnik GmbH & Co. KG

Note: All texts and images are the property of GSR Ventiltechnik GmbH & Co. KG and must not be replicated or modified, not even in part, without written approval

Original products may differ from the product images shown, due to different materials and the like

Subject to error and changes

GSR Ventiltechnik
GmbH & Co. KG
Im Meisenfeld 1
D-32602 Vlotho
T +49 5228 779-0
info@ventiltechnik.de
www.ventiltechnik.de