

# Hypercool

## Water Cooled Aftercoolers



Compressed air and gases contain high levels of liquid water vapour. Effective water removal leads to reduced maintenance costs, enhanced system operation and improved product quality. Hypercool represents the vital first step in this process, eliminating over 80% of the water present within compressed air and gas systems.

Many industrial applications require controlled compressed air or gas temperature for efficient operation, a requirement for which Hypercool is perfectly suited.

Hypercool has been specifically designed to achieve maximum cooling at minimum cost, within a package designed to withstand the rigors of modern industry.

The ribbed tubing design offers high heat exchange efficiency with minimal pressure drops. An endless range of models includes fixed and removable aftercoolers, high pressure configurations and versions with special materials for any gas and water quality requirement.



Showing optional centrifugal water separator.



### Product Features:

- Permits significant energy and capital investment savings
- Optimises the compressed air system performance or gas treatment station
- Reduces maintenance and improves product quality
- Designed to ensure reliable continuous operation
- Very low pressure drops with optimum cooling performances



ENGINEERING YOUR SUCCESS.

Aftercoolers can be installed immediately downstream of compressors or blowers in order to remove over 80% of the condensate.

Their function is to protect the entire compressed air system or production process. They control the air or gas temperature, which can be very high at the compressor outlet.

A high quality aftercooler properly sized is an excellent investment that can help ensure that the compressed air or gas system works properly thereby guaranteeing the quality of the finished product.




**Fixed configuration** with ribbed tubes, ensures high performance with low pressure drops.



**Removable version** with ribbed tubes, ensures high performance with low pressure drops; designed for easy maintenance.

### Operation

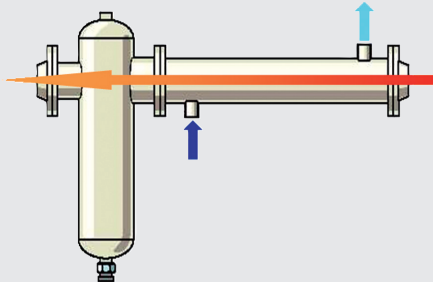

Compressed air or gas passes through the cooler tubes. Cooling water passes around the tubes in counterflow.

The air or gas is cooled down to a temperature which can be as little as 5 °C above the water inlet temperature.

Water condensate is created and efficiently removed by the separator installed at the cooler outlet.

### Models

#### WFN/WRN

Steel shell and copper tubes

#### WRS

Steel shell and stainless tubes

#### WRA

Completely stainless steel

### Versions

- Fixed or removable tube bundles
- Carbon steel shell and copper tubes for standard applications
- Completely in cupro-nickel for sea water use (available on request)
- Completely in stainless steel for aggressive gas and/or water
- Carbon steel shell and stainless steel tubes for aggressive air or gas
- High pressure models are available on request
- Stainless steel centrifugal water separators are available on request

### Accessories

- Centrifugal separator
- Demister separator (available on request)
- Flanges and counterflanges kit
- 2014/68/EU approval is offered as standard for all models

# Technical data

Model	Technical data					Dimensions (mm)				Weight (kg)
	Air Flow		Max Press.	Cooler Connections		A	B	C	D	
	m <sup>3</sup> /h	m <sup>3</sup> /min	barg	Air*	Water					



## Standard version

<b>WFN050</b>	3.000	50	12	DN125	1¼"	1.300	100	58	1.963	71
<b>WFN090</b>	5.400	90	12	DN200	1¼"	1.300	100	65	1.990	121

## Removable tube-bundle

<b>WRN007</b>	420	7	16	DN 50	½"	1.050	72	77	1.257	20
<b>WRN016</b>	960	16	16	DN 80	¾"	1.300	122	92	1.563	37
<b>WRN028</b>	1.680	28	12	DN 100	1"	1.300	122	55	1.703	54
<b>WRN050</b>	3.000	50	12	DN 125	1¼"	1.300	123	58	1.853	71
<b>WRN090</b>	5.400	90	12	DN 200	1¼"	1.300	117	65	1.873	161
<b>WRN130</b>	7.800	130	10	DN 250	1½"	1.300	116	71	1.983	194
<b>WRN170</b>	10.200	170	10	DN 300	2"	1.300	116	71	2.053	244
<b>WRN250</b>	15.000	250	10	DN 350	DN 65	1.500	196,5	71	2.503	351
<b>WRN350</b>	21.000	350	10	DN 450	DN 80	1.500	148,5	75	2.703	400
<b>WRN450</b>	27.000	450	10	DN 500	DN 100	1.500	199,5	78	3.436	609
<b>WRN550</b>	33.000	550	10	DN 600	DN 100	1.515	200	83	3.606	931

Performances refer to clean Cooler conditions with air at FAD 20°C / 1 bar A, and at the following working conditions: air suction 25°C / 60% RH, 7 barg working pressure, 120°C compressed air inlet temperature, temperature approach between air outlet and water inlet of ca. 10°C. Maximum air inlet temperature: 200°C (for higher temperatures and other gases contact Parker Sales Companies).

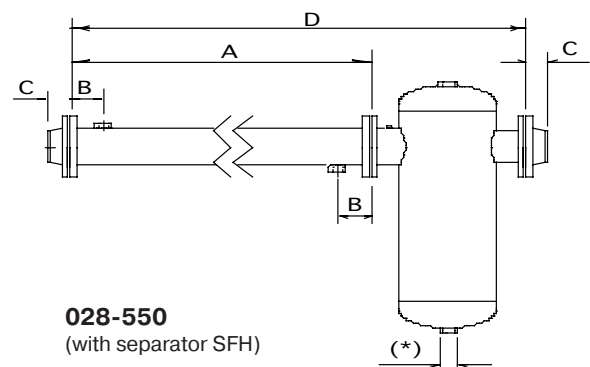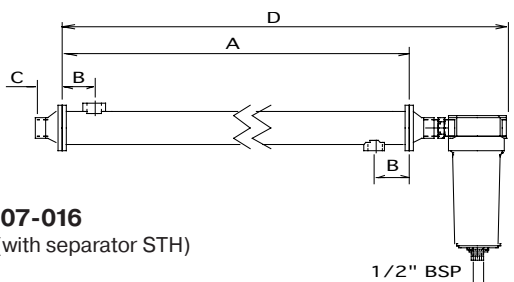

[www.parker.com/gsfe](http://www.parker.com/gsfe)



**European Headquarters**

La Tuilière 6, 1163 Etoy,  
Switzerland  
Tel: +41 21 821 85 00

**EMEA Product Information Centre**

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,  
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre

Toll-free number: 1-800-27 27 537